



RDW

Vehicle Technology Division

THE NETHERLANDS
(N E D E R L A N D)



COMMUNICATION

Concerning ⁽¹⁾:

- ~~approval granted~~
- approval extended
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~

of a type of tyre with regard to 'rolling sound emission level' and/or 'adhesion performance on wet surfaces' and/or 'rolling resistance' pursuant to Regulation number 117.

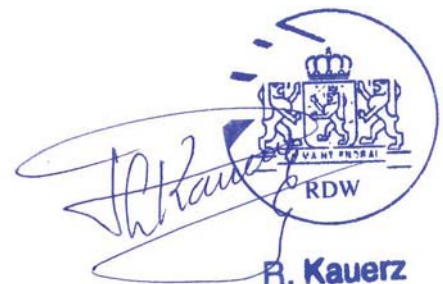
Approval number: E4-117R-023068-S2R2

Extension number: 02

- | | | |
|----|--|---|
| 1. | Manufacturer's name and address(es) | : GITI Tire (Anhui) Company Ltd.
No.8, ShiXin Road 231202, Hefei P.R.China |
| 2. | If applicable, name and address of manufacturer's representative | : not applicable |
| 3. | 'Tyre class' and 'category of use' of the type of tyre | : Class C1/ Class C2 / Class C3
: normal/snow/special |
| 4. | Brand(s) name(s) and/or Trade description(s) of the type of tyre | : <u>GT RADIAL; Giti; RUNWAY; PRIMEWELL;</u>
: <u>DEXTERO; GRANDTOUR</u> (Trademarks)
KargoMax ST-6000 (Tread pattern) |
| 5. | Technical service and, where appropriate, test laboratory approved for purposes of approval or of verification of conformity tests | : TÜV NORD Mobilität GmbH & Co. KG
Institut für Fahrzeugtechnik und Mobilität
Adlerstr. 7
: D-45307 Essen |
| 6. | Performance(s) approved | : sound level at (stage 1 /stage 2) ⁽¹⁾ , wet adhesion level, rolling resistance level (stage 1 /stage 2) ⁽¹⁾ |



- 6.1. Sound level of the representative tyre size, as per item 1.6. of the test report in the appendix to Annex 3: 70 and 71 dB(A) at reference speed of ~~70~~80 km/h⁽¹⁾.
- 6.2. Wet adhesion level of the representative tyre size, as per item 1.7. of the test report in the appendix to Annex 5: ---- (G) using the ~~vehicle~~ or trailer method⁽¹⁾.
- 6.3. Rolling resistance level of the representative tyre size, as per item 1.8. of the test report in the appendix to Annex 6: 7.41 N/kN.
7. Number of report issued by that service : CS117-B0-2012-01324
CS117-C0-2013-02658
8. Date of report issued by that service : August 16, 2012
November 25, 2013
9. Reason(s) of extension (if applicable) : Addition of trademarks and the the previous type approval number E4-117R-013068-S upgrade to amendment 02 of this regulation (addition of treadmarks and rolling resistance test)
10. Any remarks : ---
11. Place : Zoetermeer
12. Date : 24-DEC-2013
13. Signature :



14. Annexed to this communication are:
- 14.1. A list of documents in the approval file deposited at the Administration services having delivered the approval and which can be obtained upon request⁽²⁾.
- 14.2. A list of tread-pattern designations: Specify for each trademark or brand name and trade description the list of tyre size designations, adding in case of Class C1 tyres the mark 'reinforced' (or 'extra load') or the speed symbol of snow tyres or in the case of tyres of Classes C2 and C3, the mark 'traction', if so required by paragraph 3.1. of this Regulation.

⁽¹⁾ Strike out what does not apply.

⁽²⁾ In the case of category of use 'snow' a test report according to appendix of Annex 7 shall be submitted.

GITI TIRE (ANHUI) COMPANY LTD.

Information folder No.: ZP131001 Page 3 of 6

List of tyre size

Brand name(s) or Trade mark(s) : GT RADIAL; Giti; RUNWAY;
PRIMEWELL; DEXTERO; GRANDTOUR
Tread pattern : KargoMax ST-6000

Tyre size	Approval No.	Indication	Limit value for stage 2 dB(A)	Wet grip index(G)	Rolling resistance maximum values for stage 2 (N/kN)
155R13C 90/88N	E4-0018412	--	72	--	9.0
155R13C 91/89N	E4-0024128				
165R13C 96/94N	E4-0018413				
185R14C 104/102N	E4-0018414				
195/60R12C 104/102N	E4-0018415				
195/70R14C 104/102N	E4-0018416				
195/70R15C 104/102N	E4-0018417				
225/75R16C 121/120N	E4-0025744				

Test size for tyre noise:

Test Size : 195/60R12C 104/102N E4-0018415
Because of : ~~Largest section width~~
Smallest aspect ratio

Test Size : 225/75R16C 121/120N E4-0025744
Because of : Largest section width
~~Smallest aspect ratio~~

Test size for rolling resistance:

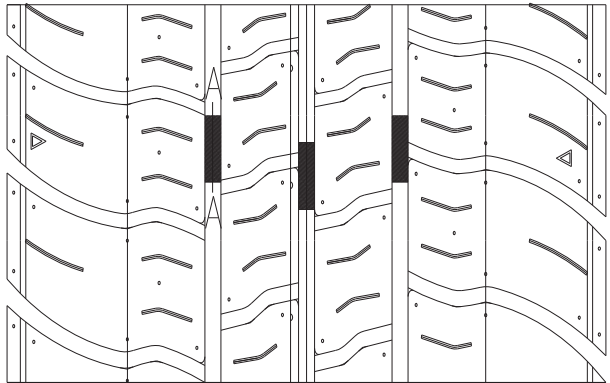
Test Size : 195/70R14C 104/102N E4-0018416
Because of : ~~Lowest load index~~
Calculated limit : 7.86



GITI TIRE (ANHUI) COMPANY LTD.

Information folder No.: ZP131001 Page 4 of 6

Drawing of the tread pattern (for measured tyre)

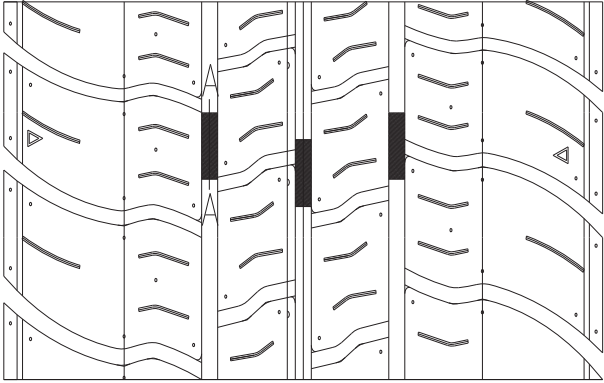
Manufacturer name	GITI TIRE (ANHUI) COMPANY LTD.
Pattern name	KargoMax ST-6000
Tyre Size	195/60R12C 104/102N
Market	EU
Marking	M+S
Pitch number	50
Pitch ratio	1.00/1.12/1.26
Void volume [%]	78
Width: main grooves [mm]	6.5/6.5
Depth: center groove [mm]	7.7
Depth: shoulder groove [mm]	6.2
Pattern	



GITI TIRE (ANHUI) COMPANY LTD.

Information folder No.: ZP131001 Page 5 of 6

Drawing of the tread pattern (for measured tyre)

Manufacturer name	GITI TIRE (ANHUI) COMPANY LTD.
Pattern name	KargoMax ST-6000
Tyre Size	225/75R16C 121/120N
Market	EU
Marking	M+S
Pitch number	63
Pitch ratio	1.00/1.20/1.40
Void volume [%]	79
Width: main grooves [mm]	6.8/6.7
Depth: center groove [mm]	8.2
Depth: shoulder groove [mm]	6.7
Pattern	



GITI TIRE (ANHUI) COMPANY LTD.

Information folder No.: ZP131001 Page 6 of 6

Drawing of the tread pattern (for measured tyre)

Manufacturer name	GITI TIRE (ANHUI) COMPANY LTD.
Pattern name	KargoMax ST-6000
Tyre Size	195/70R14C 104/102N
Market	EU
Marking	M+S
Pitch number	62
Pitch ratio	1.00/1.13/1.28
Void volume [%]	77
Width: main grooves [mm]	6.2/6.2
Depth: center groove [mm]	7.7
Depth: shoulder groove [mm]	6.2
Pattern	